


MODEL: 50279

PACKING DIAGRAM

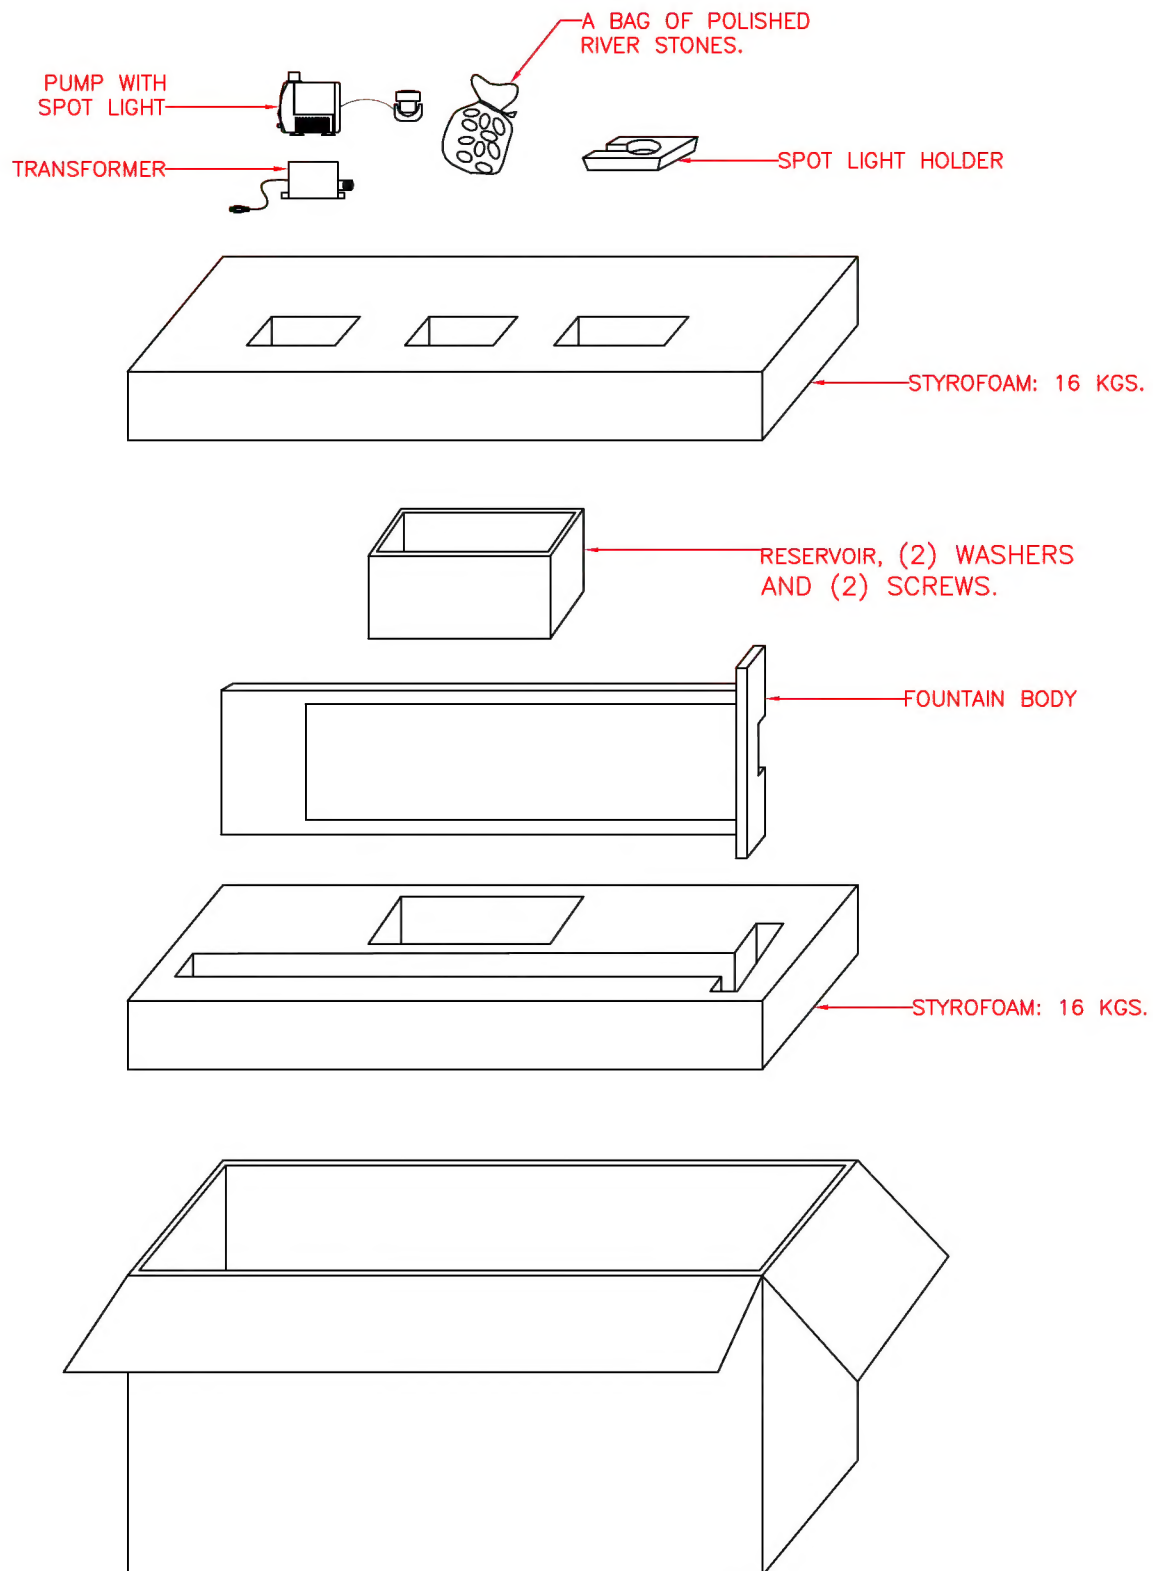

MODEL: 50279BLSLCP  
**ASSEMBLY INSTRUCTIONS**  
**READ AND SAVE THESE INSTRUCTIONS**

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS FOUNTAIN SHOULD TAKE APPROXIMATELY 15 MINUTES TO ASSEMBLE.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.


**UNPACK THE FOUNTAIN**

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS: FOUNTIAN BODY, RESERVOIR, FRAME, PUMP WITH SPOT LIGHT, EXTRA MR-11 BULB, SPOT LIGHT HOLDER, (2) WASHERS, (2) SCREWS, A BAG OF RIVER STONES AND TRANSFORMER.


TOOLS NEEDED (NOT SUPPLIED): SCREWDRIVER.

**FOUNTAIN ASSEMBLY**


1. ATTACH PUMP TO FOUNTAIN HOSE.
2. PLACE THE FOUNTAIN BODY ONTO RESERVOIR, THEN SECURE WITH (2) WASHERS AND (2) SCREWS.

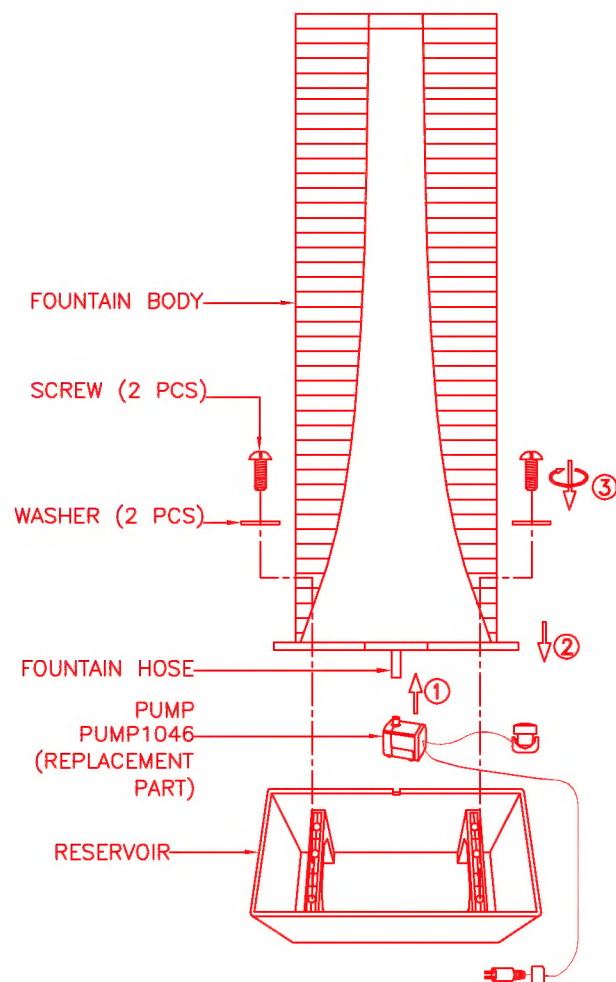

3. PLACE SPOT LIGHT INTO THE SPOT LIGHT HOLDER, THEN PLACE THE SPOT LIGHT HOLDER ONTO RESERVOIR.

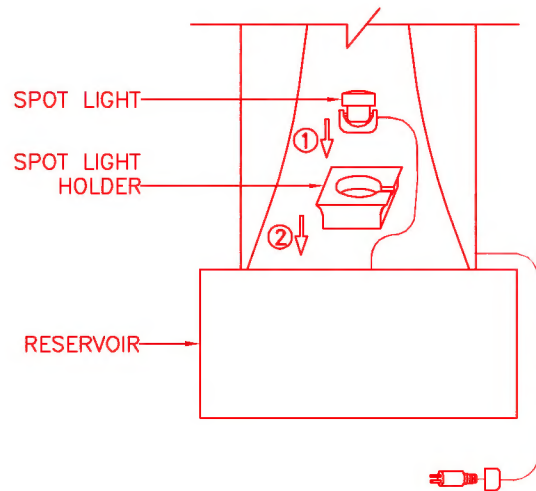

4. SLIDE FRAME OVER TOP OF FOUNTAIN BODY AND SECURE FRAME ONTO THE RESERVOIR.

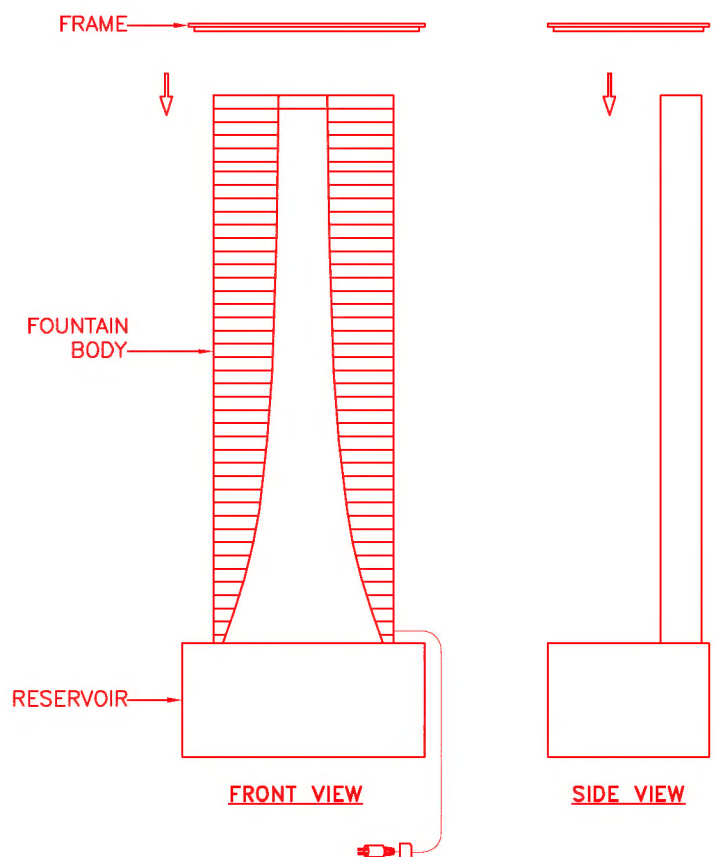

MODEL: 50279BLSLCP  
**ASSEMBLY INSTRUCTIONS**  
**READ AND SAVE THESE INSTRUCTIONS**

**FOUNTAIN ASSEMBLY**


5. PLACE DECORATIVE RIVER STONES INSIDE TOP OF RESERVOIR.

6. FILL RESERVOIR WITH ENOUGH WATER TO COMPLETELY SUBMERSE PUMP.

(DISTILLED WATER IS RECOMMENDED TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD-UP.)

NOTE: RESERVOIR HOLDS 2.6 GALLONS OF WATER.

7. JOIN THE CONNECTORS AT TRANSFORMER AND SCREW THE CAP AND CONNECTOR TIGHTLY TOGETHER.

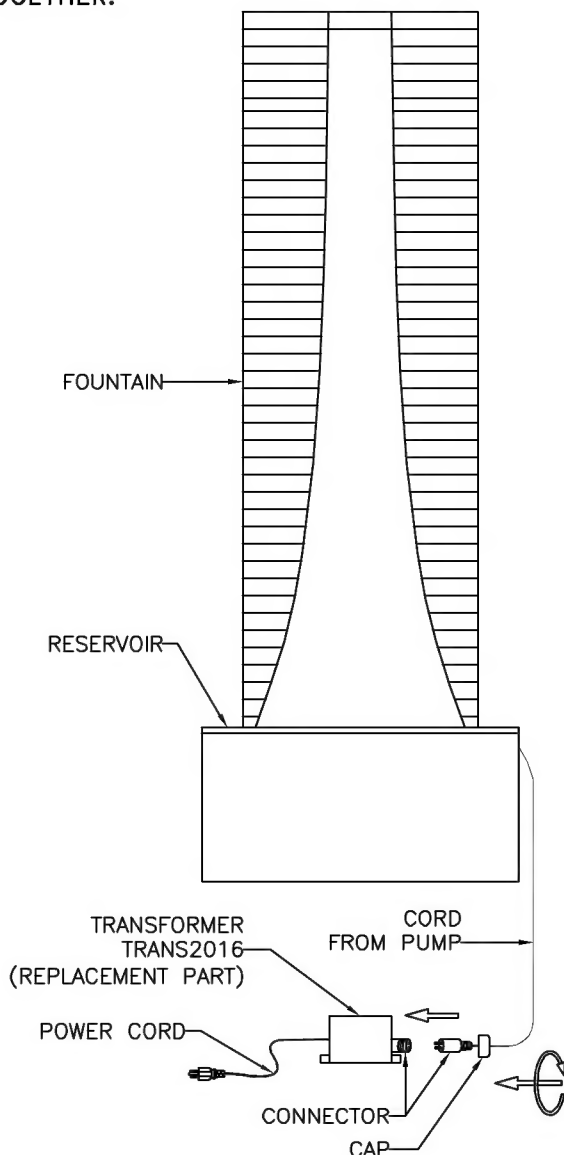

8. PLUG POWER CORD INTO SOCKET, YOUR NEW FOUNTAIN IS READY TO USE.

**TROUBLE SHOOTING:**

1. IF YOUR FOUNTAIN DOES NOT WORK, CHECK PLUG AT THE SOCKET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE WALL OUTLET.

2. NEXT CHECK TO MAKE SURE THE OUTLET IS POWERED.

3. IF THE FOUNTAIN STILL DOES NOT WORK, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

**SPLASHING DISCLAIMER:**

SPLASHING MAY OCCUR WHEN FOUNTAIN IS INITIALLY TURNED ON. PROTECT SURROUNDING SURFACES AS NEEDED.

**IMPORTANT PUMP INFORMATION:**

PUMP MUST BE FULLY SUBMERSED IN WATER WHILE OPERATING.

**WATER:**

TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP THE USE OF DISTILLED WATER IS RECOMMENDED.

**WARNING:**

\* ONCE A WEEK INSPECT FOUNTAIN, FLOOR AND ADJACENT WALL FOR MOISTURE BUILD-UP AND CLEAN AS NECESSARY. THIS IS ESPECIALLY IMPORTANT FOR HUMID ENVIRONMENTS.

\*\* THIS FOUNTAIN IS RATED FOR OUTDOOR USE.

\*\*\* THIS UNIT MUST BE CONNECTED TO A SUPPLY CIRCUIT THAT IS PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFCI). THE GFCI SHOULD BE TESTED ON A ROUTINE BASIS. TO TEST THE GFCI, PUSH THE TEST BUTTON. THE GFCI SHOULD INTERRUPT POWER. PUSH THE RESET BUTTON. POWER SHOULD BE RESTORED. IF THE GFCI FAILS TO OPERATE IN THIS MANNER, THE GFCI IS DEFECTIVE.

**AVAILABLE PARTS ARE:**

PUMP1046 (PUMP WITH SPOT LIGHT)  
TRANS2016 (TRANSFORMER)